



# SafetyRailCompany

Fall Protection for Life and Compliance



## SRC HATCHGUARD

### ROOF HATCH FALL PROTECTION

#### DESCRIPTION

The SRC Hatchguard is an OSHA compliant, passive fall-protection system that installs without welding, drilling or roof membrane penetration. Standard system is a one-piece that drops over the top of the roof hatch and is secured with four compression bolts. Installation takes 15 minutes.

#### APPLICATIONS

OSHA requires all openings in roofs to be guarded with an OSHA compliant fall protection railing system. Use for any roof hatch through which personnel will pass to access roof.

#### OSHA COMPLIANCE

- Compliant with OSHA standards for guardrails: (29 CFR 1910.29 & 29 CFR 1926.502). Meets CalOSHA standards
- Independently tested by a nationally accredited engineering lab - documentation available upon request

#### FEATURES

- Built-in grab bars, self-closing gate and 2' egress/ingress safe landing zone
- Non-penetrating design will not compromise building envelope
- No welding or drilling required for installation
- American Welding Society Certified (AWS D1.1 & D1.3)
- 100% Made in USA
- Galvanized or powdercoat finish
- Use on roof hatches with standard curb detail
- Modular Hatchguard Kits available

#### MINIMUM REQUIREMENTS


- Requires raised curbing typically found on roof hatch kits
- Designed for flat and low-sloped roofs, up to a 1:12 roof pitch
- Additional SRC product options available for steep-sloped roofs

# SRC HATCHGUARD


# PRODUCT SPECIFICATIONS

## DIMENSIONS

SIDE VIEW

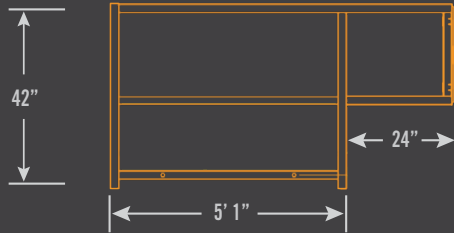

TOP VIEW

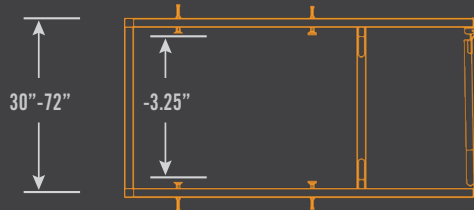

## SIZE OPTIONS

24"x 36"	125 lbs
30"x 54"	140 lbs
30"x 96"	185 lbs
36"x 30"	134 lbs
36"x 30"	134 lbs
36"x 36"	140 lbs
36"x 42"	147 lbs
36"x 58"	156 lbs
36"x 90"	185 lbs
36"x 100"	208 lbs
42"x 42"	150 lbs
48"x 48"	158 lbs

WIDE RANGE OF ADDITIONAL  
CUSTOM SIZES AVAILABLE


## NON-PENETRATING COMPRESSION FIT



## FINISH OPTIONS



SAFETY YELLOW



GALVANIZED



SAFETY YELLOW  
+GALVANIZED



CUSTOM  
COLORS

## PRODUCT SPECIFICATIONS

- Designed in accordance with OSHA Standards (29 CFR 1910.29 and CFR 1926.502)
- Tested for 200 lb (90.7kg) force in any direction
- Assembled height: 42" (107cm) top rail, 21" (53cm) mid rail
- Variety of finish options available
- 100% Made in USA
- American Welding Society Certified (AWS D1.1 & D1.3)
- All steel construction for longterm durability
- One piece welded design standard, optional assemble on-site modular design available
- No mechanical penetrations required
- Built-in R/L hand grab bars for secure hand positioning
- 2' safe landing zone provides sure footing in egress/ingress
- Self-closing gate ensures complete 4-sided protection at all times



## INSTALLATION

- Using two people, set Hatchguard over existing roof hatch
- Using a wrench, tighten (4) rubber-tipped compression bolts against roof hatch curb to prevent movement
- Estimated time to completion: 15 minutes

PROJECT:

CONTRACTOR:

DATE:

Certified third party OSHA testing  
results available on request